


FPSLPK Installation Instructions

LP Conversion Kit- Large Tank



Air Mixer (#127)

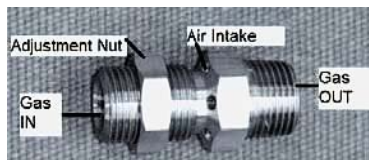

Coupler (#565)



IMPORTANT

READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING

WARNING: If the information in this manual is not followed, an explosion or fire could result causing property damage, personal injury, or loss of life.

IF YOU SMELL GAS: Shut off gas to appliance immediately. If odor continues, call gas supplier or Fire Department immediately.

We highly recommend that our products be installed and serviced by professionals that have been certified by NFI (National Fireplace Institute) in the U.S. or WETT (Wood Energy Technical Training) in Canada. INSTALLATIONS MUST BE DONE IN ACCORDANCE WITH LOCAL CODES.

These are instructions for the FPSLPK, LP conversion kit designed to be used with match lit fire ring kits and log lighters.

These instructions must be used as a supplement to those that came with your gas log set and your safety pilot kit. Follow those instructions carefully and make the appropriate adjustments for the addition of this kit.

FPSLPK Parts List

- 1) #127 Air Mixer/Orifice- 150k Btu (Drill size #26)
- 2) #565 1/2" Stainless Steel Coupler

FPSLPK Installation Instructions

IMPORTANT: Apply joint compound to all male pipe fittings only- DO NOT use on FLARED fittings. Use gas rated TEFLON tape on flared fittings.

- 1) If NOT using Hearth Products Controls pan, skip to Step 2. Thread and tighten coupler (#565) to bottom of pan- see Fig. 1.
- 2) Thread and tighten **Air Mixer/Orifice** (#127) into bottom of fire ring or coupler in direction as shown below. For ring only see Fig. 2.

IMPORTANT: Confirm "Gas In" is towards control valve or shutoff valve.

CAUTION: Installing backwards will result in severe gas leak and risk of explosion.

- 3) Use adjustment nut to for desired flame pattern. Threading nut clockwise will close air mixer openings and result in sooty flame. Normally this nut is fully open (counterclockwise) for cleanest flame.



Fig. 1 Using Pan



Fig. 2 Using Only Ring